

EXLUX Linear Luminaire with LED

Series 6002/4



- The latest LED technology with a high luminous efficacy and a long service life
- Extremely high luminaire efficacy
- Luminous flux after 100,000 h still 90% of the starting luminous flux
- Optionally with DALI for controlling and monitoring the luminaire
- Optionally addressable for direct actuation of a common battery system

E2

WebCode 6002D



The linear luminaire with Series 6002/4 LED is ideal for lighting surfaces at a mounting height of up to 10 m. It can also be used to illuminate equipment and objects, both inside and outside. The pole mounting sleeve accessory can be used to easily mount the luminaire on poles. Optionally, the luminaire can be equipped with addressable equipment. It can be used to control and monitor the luminaire for the common battery systems.

	IECEx / ATEX					
Zone	0	1	2	20	21	22
Installation in		•	•		•	•

Selection Table									
Size	2								
Translucent cover	Clear								
Light distribution	120°x120° with diffusing glass								
Lamp wattage	22 W								
Luminous flux	2910 lm								
Luminaire efficacy	132 lm/W								
Product variant	Drilled holes	Disconnection of the luminaire	Light colour	Threaded plate	Cable glands and entries	Stopping plugs	Product Type	Art. No.	Weight kg
Interfaces DALI	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4128-0110-172-1110-11-8500	272391	4.450
standard	3 x M20	No	5000K - neutral white	2x SS430 stainless steel	Can be ordered as accessories	Can be ordered as accessories	6002/4128-0100-152-2220-22-8500	267067 ▲	4.400
	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4128-0100-152-1110-11-8500	267058 ▲	4.450
with address module	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4128-0130-152-1110-11-8500	275740	4.500
Size	2								
Translucent cover	Translucent								
Light distribution	120°x120°								
Lamp wattage	22 W								
Luminous flux	2910 lm								
Luminaire efficacy	132 lm/W								
Product variant	Drilled holes	Disconnection of the luminaire	Light colour	Threaded plate	Cable glands and entries	Stopping plugs	Product Type	Art. No.	Weight kg
standard	3 x M20	No	5000K - neutral white	2x SS430 stainless steel	Can be ordered as accessories	Can be ordered as accessories	6002/4124-0100-152-2220-22-850S	285108	4.350
	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4124-0100-152-1110-11-850S	285105 ▲	4.400

EXLUX Linear Luminaire with LED

Series 6002/4

E2

Selection Table

Size		4							
Translucent cover		Clear							
Light distribution		120°x120° with diffusing glass							
Lamp wattage		42 W							
Luminous flux		5810 lm							
Luminaire efficacy		138 lm/W							
Product variant	Drilled holes	Disconnection of the luminaire	Light colour	Threaded plate	Cable glands and entries	Stopping plugs	Product Type	Art. No.	Weight kg
Interfaces DALI	3 x M20	No	5000K - neutral white	2x SS430 stainless steel	Can be ordered as accessories	Can be ordered as accessories	6002/4148-0110-172-2220-22-8500	274963	6.900
	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4148-0110-172-1110-11-8500	267087	6.900
standard	3 x M20	No	5000K - neutral white	2x SS430 stainless steel	Can be ordered as accessories	Can be ordered as accessories	6002/4148-0100-152-2220-22-8500	267077 ▲	6.900
	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4148-0100-152-1110-11-8500	267074 ▲	6.900
with address module	3 x M20	No	5000K - neutral white	2x SS430 stainless steel	Can be ordered as accessories	Can be ordered as accessories	6002/4148-0130-152-2220-22-8500	277241	6.900
	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4148-0130-152-1110-11-8500	275741	6.900
Size		4							
Translucent cover		Translucent							
Light distribution		120°x120°							
Lamp wattage		42 W							
Luminous flux		5180 lm							
Luminaire efficacy		138 lm/W							
Product variant	Drilled holes	Disconnection of the luminaire	Light colour	Threaded plate	Cable glands and entries	Stopping plugs	Product Type	Art. No.	Weight kg
standard	3 x M20	No	5000K - neutral white	2x SS430 stainless steel	Can be ordered as accessories	Can be ordered as accessories	6002/4144-0100-152-2220-22-850S	285109	6.850
Size		4							
Translucent cover		Translucent							
Light distribution		120°x120°							
Lamp wattage		42 W							
Luminous flux		5810 lm							
Luminaire efficacy		138 lm/W							
Product variant	Drilled holes	Disconnection of the luminaire	Light colour	Threaded plate	Cable glands and entries	Stopping plugs	Product Type	Art. No.	Weight kg
standard	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4144-0100-152-1110-11-850S	285106 ▲	6.850
Size		6							
Translucent cover		Clear							
Light distribution		120°x120° with diffusing glass							
Lamp wattage		50 W							
Luminous flux		6960 lm							
Luminaire efficacy		139 lm/W							
Product variant	Drilled holes	Disconnection of the luminaire	Light colour	Threaded plate	Cable glands and entries	Stopping plugs	Product Type	Art. No.	Weight kg
standard	3 x M20	No	5000K - neutral white	2x SS430 stainless steel	Can be ordered as accessories	Can be ordered as accessories	6002/4168-0200-152-2220-22-8500	278346	8.000
	3 x M25	No	5000K - neutral white	2x plastic	2 x M25 Ø 7 – 17 mm	2 x M25 x 1.5	6002/4168-0200-152-1110-11-8500	278349 ▲	8.000

Variants with 2 x threaded plate plastic and 3 x drilled holes M25:

Cable glands 2 x M25 Ø 7 -17 mm and 2 x stopping plugs M 25 x 1,5 are included loose with the product (installation required). Threaded plate included.

Variants with 2 x threaded plate stainless steel SS430 and 3 x drilled holes M20:

Cable glands and stopping plugs can be ordered as accessories. Threaded plate included.

The light fittings are supplied without mounting material.

EXLUX Linear Luminaire with LED

Series 6002/4

E2

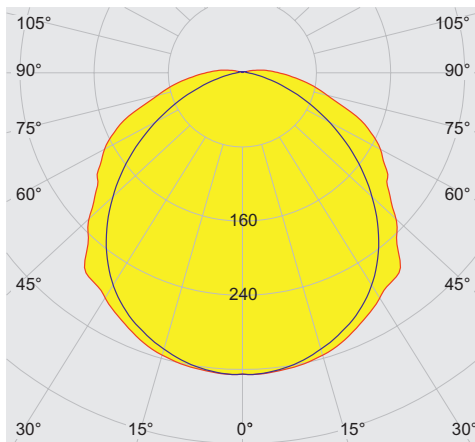
Technical Data		
Variant	standard / product variant "-"	with address module
Explosion Protection		
IECEX gas explosion protection	Ex db eb ib mb op is IIC T4 Gb	Ex db eb ib mb op is IIC T4 Gb
IECEX dust explosion protection	Ex tb op is IIIC T100 °C Db	Ex tb op is IIIC T100 °C Db
ATEX gas explosion protection	Ⓔ II 2 G Ex db eb ib mb op is IIC T4 Gb	Ⓔ II 2 G Ex db eb ib mb op is IIC T4 Gb
ATEX dust explosion protection	Ⓔ II 2 D Ex tb op is IIIC T100 °C Db	Ⓔ II 2 D Ex tb op is IIIC T100 °C Db
Certificates	ATEX (IBE), IECEX (IBE)	ATEX (IBE), IECEX (IBE)
Ship approval	DNV GL	DNV GL
Electrical Data		
Rated operational voltage AC	100 – 240 V	220 – 240 V
Rated operational voltage DC	110 – 250 V	194 – 250 V
Frequency range	50 – 60 Hz	50 Hz
Ambient Conditions		
Ambient temperature	-40 °C ... +50 °C Note: Through wiring Max. 3x16 A -40 °C ... +60 °C Note: Through wiring 2 Max. 3x10 A	-40 °C ... +50 °C Note: Through wiring Max. 3x16 A -40 °C ... +60 °C Note: Through wiring 2 Max. 3x10 A
Lighting Data		
Number of lamps	1	1
Lamp	LED	LED
Colour rendering	≥ 80	≥ 80
Colour temperature	5000 K	5000 K
Mechanical Data		
Impact strength (IEC 62262)	IK10	IK10
IP degree of protection (IEC 60598)	IP66/IP67	IP66/IP67
Enclosure colour	Light grey (RAL 7035)	Light grey (RAL 7035)
Enclosure material	Polyester resin, Glass fibre reinforced	Polyester resin, Glass fibre reinforced
Diffuser	Without diffuser	With diffuser
Sealing material	Silicone	Silicone
Max. solid connection terminals	6 mm ²	6 mm ²
Max. finely stranded connection terminals	4 mm ²	4 mm ²
Type of connection cable	Finely stranded Solid	Finely stranded Solid
Notes	Connection terminals: Spring clamp terminal (2 free clamping units per pole)	
Components		
Ballast	6045/211-120-10	6045/212-122-10
Through wiring	With 5 conductors 2.5 mm ²	With 5 conductors 2.5 mm ²
Cable entry material	Polyamide, black	Polyamide, black
Stopping plug material	Polyamide, black	Polyamide, black

EXLUX Linear Luminaire with LED

Series 6002/4


E2

Light Distribution Curves – Subject to Alterations



cd/klm 100%
 — C0 - C180 — C90 - C270




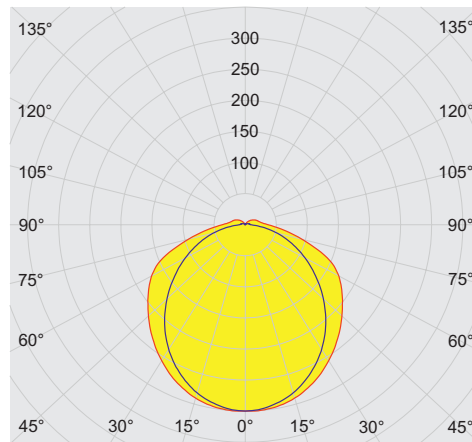
typical with diffuser, clear translucent cover



cd/klm 100%
 — C0 - C180 — C90 - C270

typical without diffuser, diffuse translucent cover

Accessories




Figure	Description	Art. No.	Weight kg
Breather			
	Thread: M25 x 1.5; 1 pc; for installation in lights; in moulded material; without counter nut	138573 ▲	0.010
	Thread: M25 x 1.5; 20 pc; for installation in lights; in moulded material; without counter nut	138576	0.200
Ceiling and wall mounting bracket			
	mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair	222827 ▲	1.200
Cover			
	for luminaire size 2 (diffuse), the visibility of the indicator LED may be restricted when used on a single supplied emergency luminaire	276669	1.000
	for luminaire size 4 (diffuse), the visibility of the indicator LED may be restricted when used on a single supplied emergency luminaire	276670	1.200
Mounting bracket			
	mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair	222456 ▲	0.400
Mounting rail			
	for a variable mounting distance; 1 pair	222826 ▲	0.350
Pipe clamp			
	R 1 1/2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222459 ▲	0.700
	R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222458 ▲	0.700
	R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222460 ▲	0.750

EXLUX Linear Luminaire with LED



Series 6002/4

E2


Accessories

Figure	Description	Art. No.	Weight kg
Pole mounting sleeve			
	for the subsequent mounting on lights size 2 and size 4, completely with assembly parts (for pipe diameter 42 mm)	227512 ▲	3.200
Ring bolt			
	M8, direct mounting in insert nuts; 1 pair	115736 ▲	0.115
Socket key			
	M8 / wrench size 13; to open/close the central locking	222430 ▲	0.110

Spare Parts

Figure	Description	Art. No.	Weight kg
Contact element			
	8080/1-3-L 2 NC contact element	132527 ■	0.026
Cover			
	for luminaire size 4	222428	1.149
	for luminaire size 2	222427	0.639

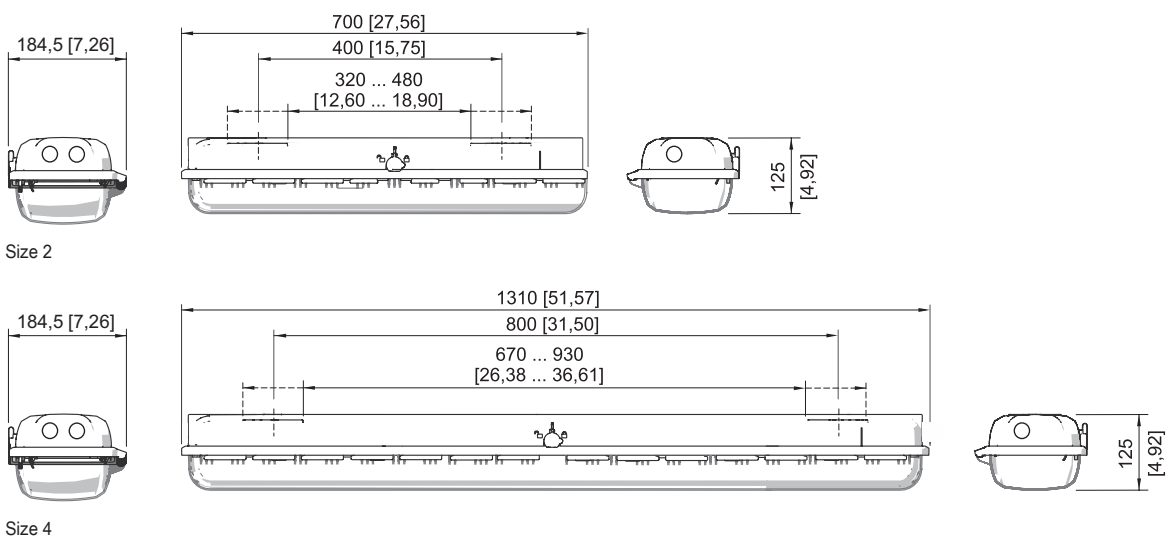
Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations




EXLUX Linear Luminaire with LED

Series 6002/4

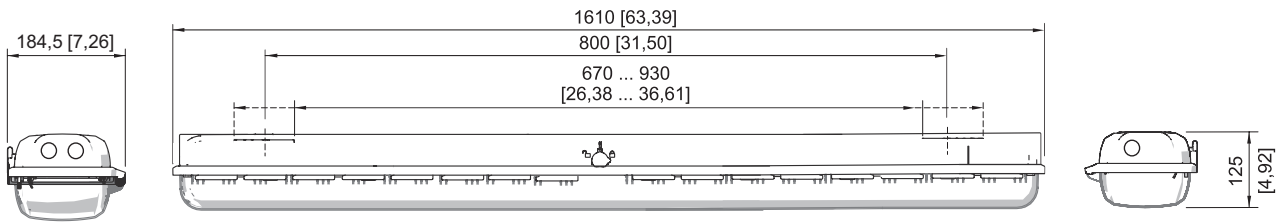
E2




Size 6

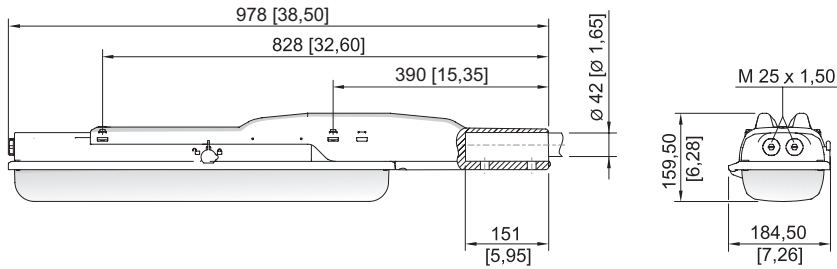



Size 2

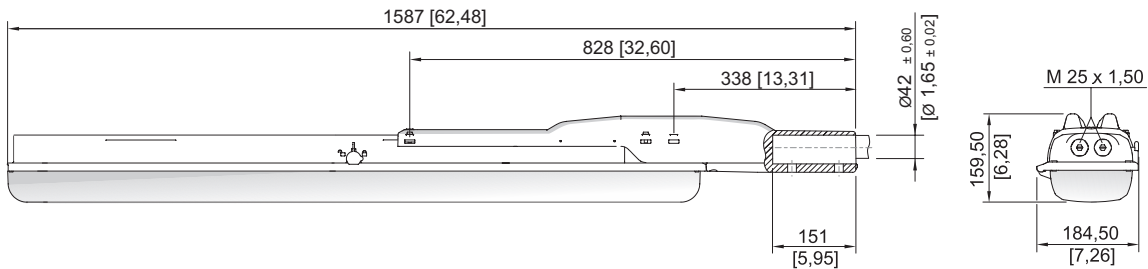

Size 4



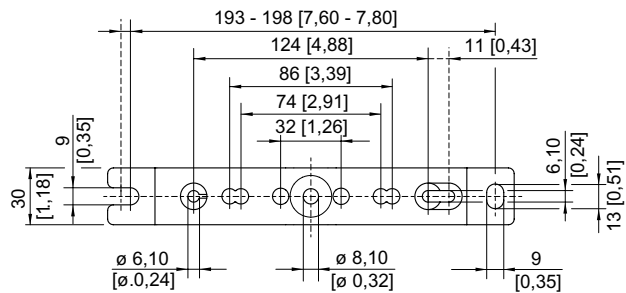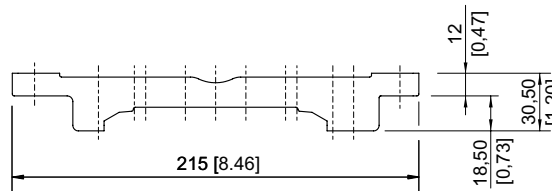Ring bolt fitted in insert nut of the luminaire




Mounting rail


EXLUX Linear Luminaire with LED

Series 6002/4


E2




Mounting rail




Pipe clamp fitted in mounting rail



Mounting bracket fitted in mounting rail



A



Wall mounting bracket fitted in mounting rail

Inrush current

$I_{peak} = 51\text{ A}$; $\Delta t = 127\ \mu\text{s}$

Maximum number of luminaires per miniature circuit breaker:

Type	10 A	16 A	20 A	25 A
B	12	19	24	31
C	20	33	41	51
K	41	66	82	103

typical value for 1-pole miniature circuit breaker at +25 °C and nominal voltage 230 V AC; the exact number depends on the miniature circuit breaker used