




**SERIES ALUPRES  
INTERLOCKED SOCKET**  
**CODE 472457**

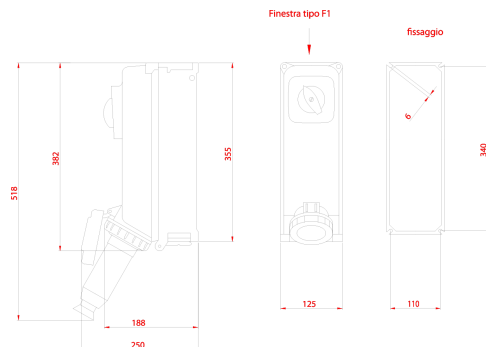

### Datasheet

#### Electrical characteristics

Rated current	63A
Supply Voltage	400V 50/60Hz ●
Poles	3P+N+ $\perp$
Clock Position	6h
Rated insulation voltage	500V
Insulation Class	I
Protection	FUSE 22x58 MAX 63A
Signal plug inserted	1 contact pilot

#### Technical data switch

Thermal current	63 A
Rated short-circuit current	10 kA
Terminals type	A serraggio indiretto
Conductors section	Min: 6 mm <sup>2</sup> ;Max: 16 mm <sup>2</sup>
Terminal tightening torque	3 Nm
Auxiliary status contacts	Max 2 (optional)
Padlockable handle	3 locks Ø 8 mm max
Operating category	AC-23A / AC-3 63A - 415V

#### Mechanical characteristics

Manufacturing material	Low copper aluminium alloy (EN 44300)
Treatment type	Fluorozirconic passivation
Surface finishing	Hot polymerized non-toxic polyester
Color	RAL 5012 (Cover), RAL 7035 (Base)
Width	125 mm
Execution	Wall mounting
Hole type	F1
Protection degree	IP66/IP67
Additional degree protection	IP69 - IEC 60529
Shock resistance	IK10 according to IEC/EN 62262
Resistance to Glow wire	960 °C (Switch), 960 °C (Live contacts holder)
Flammability rating according UL94	V-0 (Live contacts holder), V-0 (Switch)
Corrosivity category	C4 (ISO 9223)
Net Weight	5.205 KG
Working Environment Temp.	Min: -25°C ;Max: +50°C
Warehousing Temperature	Min: -30°C ;Max: +70°C

#### Reference Standards and Directives

Certification and approval marks	NYCE COLOMBIA, UKR, CE, UKCA
Directives	2012/19/EU (WEEE), 2011/65/EU (RoHS), 2014/35/EU (LVD)
Reference Standards	EN 60309-1:1999, EN 60309-2:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-1:1999/A1:2007, EN 63000:2018, EN 60309-1:1999/A2:2012, EN 60309 1:1999/A1AC:2014

The images are purely indicative. Palazzoli reserves the right to make changes without notice.



**SERIES MULTIMAX  
PLUG  
CODE 710346**



## Datasheet

### Electrical characteristics

Rated current	63A
Supply Voltage	400V 50/60Hz ●
Poles	3P+N+ $\perp$
Clock Position	6h
Rated insulation voltage	690V
Signal plug inserted	1 contact pilot

### Mechanical characteristics

Manufacturing material	Thermoplastic
Alveolus/plugs treatment	Nickel plated
Color	Grey RAL 7042
Tightening diameter	20 ÷ 31,5 mm
Execution	MOBILE
Protection degree	IP67
Additional degree protection	-
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	850 °C
Flammability rating according UL94	V-2
Terminals type	A serraggio indiretto
Conductors section	Min: 4 mm <sup>2</sup> ;Max: 25 mm <sup>2</sup>
Terminal tightening torque	2,5 Nm
Net Weight	732 G
Working Environment Temp.	Min: -25°C ;Max: +50°C
Warehousing Temperature	Min: -30°C ;Max: +70°C

### Reference Standards and Directives

ETIM classification	EC000140
Certification and approval marks	UKR, CE, NYCE COLOMBIA, UKCA
Directives	2011/65/EU (RoHS), 2014/35/EU (LVD), 2012/19/EU (WEEE)
Reference Standards	EN 63000:2018, EN 60309-1:1999, EN 60309 1:1999/A1AC:2014, EN 60309-2:1999, EN 50581:2012, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A2:2012, EN 60309 2:1999/A1:2007, EN 60309-2:1999/A2:2012

The images are purely indicative. Palazzoli reserves the right to make changes without notice.