

# YA80 Sounder

Datasheet Version 1.0




Output: 116dB(A)  
32 tones, 2 stages

Audio visual  
signalling




IP rating: IP65  
24Vdc/115Vac/230Vac



# YA80 Sounder

Datasheet Version 1.0

<b>Output</b>	116dB(A) @ 1m
<b>Tones</b>	32
<b>Stages</b>	2
<b>IP rating</b>	IP65
<b>Connection</b>	Vdc variants: separate input and output 2,5mm 2 terminals  Vac variants: 2,5mm <sup>2</sup> terminals
<b>Storage temp.</b>	-40° to +70°C
<b>Operating temp.</b>	-25° to +55°C  UL variant: -35 to +66 °C
<b>Humidity</b>	93% ± 3 at 40 °C
<b>Unit material</b>	Flame retardant ABS, stainless steel fixings
<b>Body colour</b>	Red

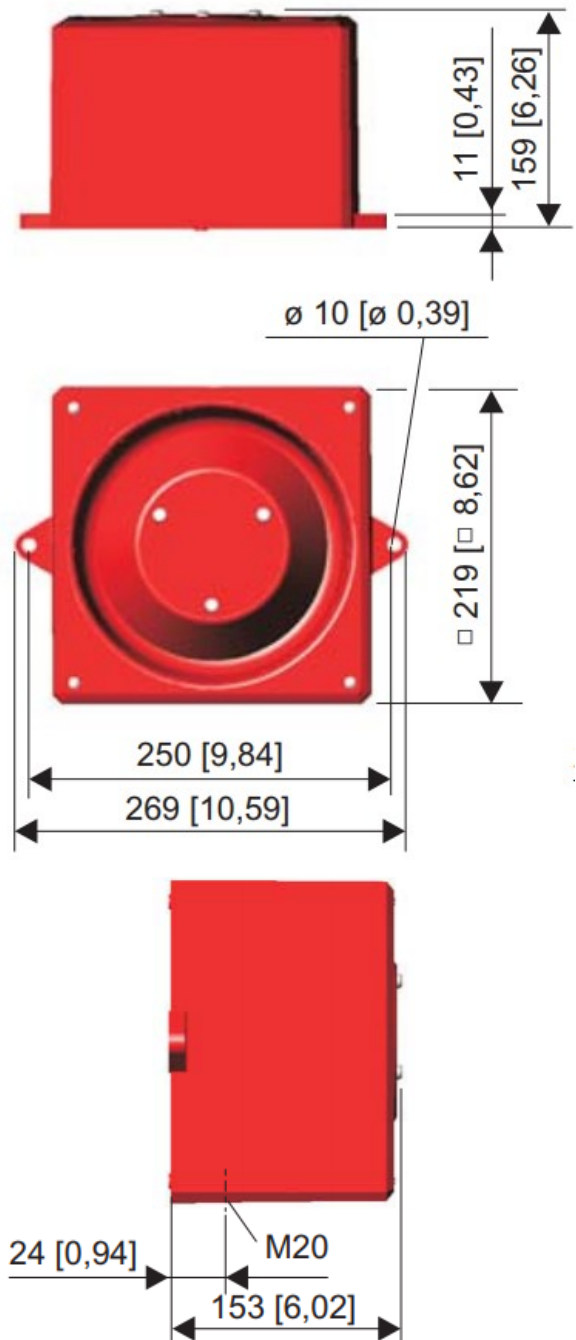

Version/ Certification	Voltage	Model No.	Weight	Current
YA80 Sounder, BS EN 54-3 + MED, standard devices	24Vdc	YA80/D/RF/WR	2.9kg	309mA
	115Vac	YA80/L/RF/WR	3.28kg	118mA
	230Vac	YA80/N/RF/WR	3.28kg	59mA
YA80 Sounder, UL certification	24Vdc	YA80/D/RF/UL	2.9kg	309mA
	115Vac	YA80/L/RF/UL	3.28kg	118mA
	230Vac	YA80/N/RF/UL	3.28kg	59mA

**Note:** Other voltages and variants may be available as specials. Contact our sales team for more details.